



CUT-AWAY PERSPECTIVE

WINDOW SCHEDULE		
NO.	WIDTH	HEIGHT
A	2'-8"	3'-6"
B	2'-8"	1'-10"


DOOR SCHEDULE		
NO.	WIDTH	HEIGHT
1	3'-8"	6'-8"
2	3'-0"	6'-8"
3	2'-4"	6'-8"
4	2'-0"	7'-0"
5	4'-0"	7'-0"
6	3'-4"	7'-0"
7	3'-8"	6'-8"

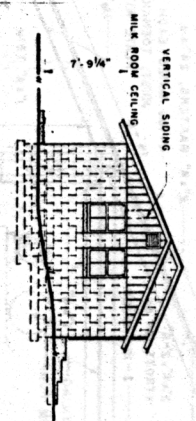


RIGHT END ELEVATION

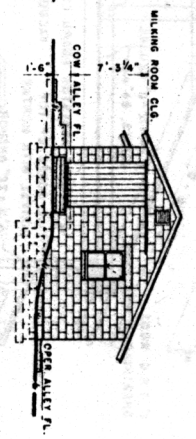


LEFT END ELEVATION

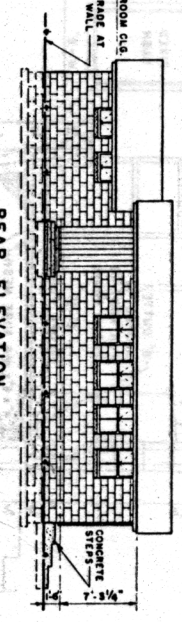

REAR ELEVATION

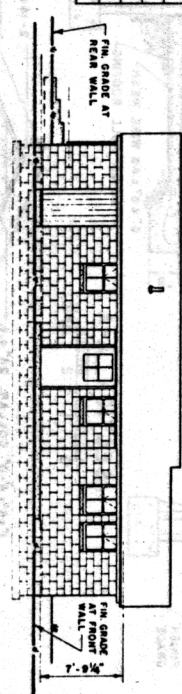

FRONT ELEVATION

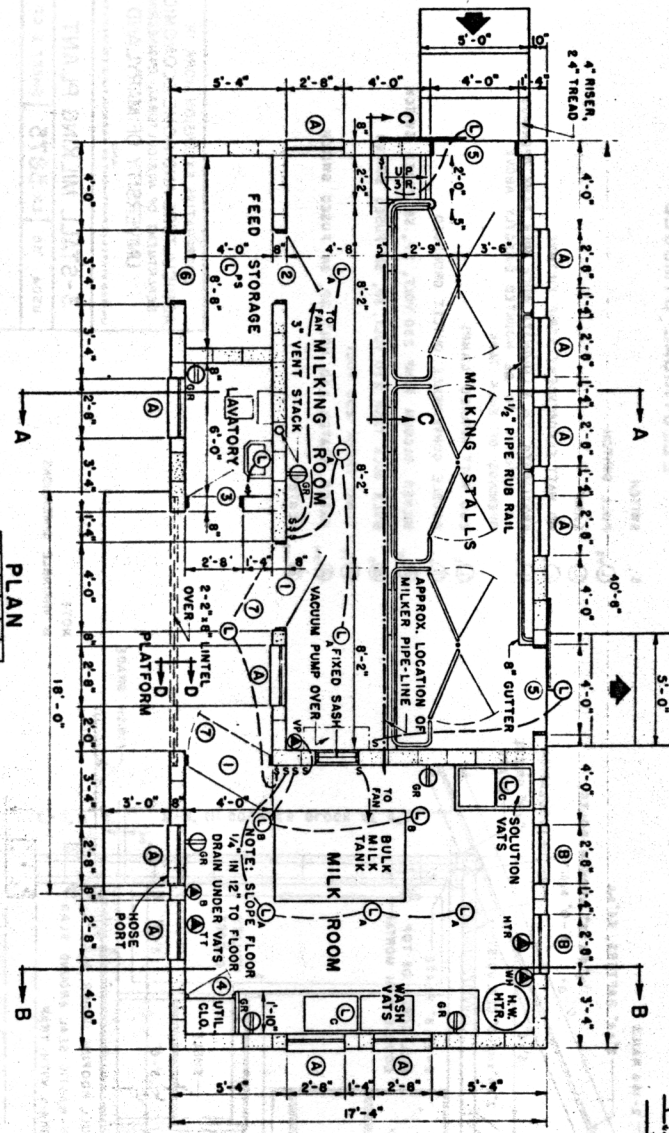

- GENERAL NOTES**
1. CONSULT LOCAL HEALTH AUTHORITIES BEFORE STARTING CONSTRUCTION TO BE SURE THAT PLAN CONFORMS WITH LOCAL REGULATIONS.
 2. VARIABLE DIMENSIONS MARKED WITH * CARRY FOUNDATION TO SOLID GROUND BELOW FROST.
 3. PRECAST CONCRETE LINTELS OVER OPENINGS HAVING MASONRY ABOVE. LINTELS TO HAVE 8" BEARING ON EACH END. REINFORCE LINTELS WITH 2-3/8" RODS 4" APART AND 1 1/2" FROM BOTTOM.
 4. FILL BLOCK CORES UNDER ENDS OF LINTELS WITH CEMENT MORTAR.
 5. CONCRETE FLOORS USED BY CATTLE TO HAVE BROOMED (ROUGH) FINISH.
 6. PAINT EXTERIOR SURFACE OF BLOCK WALL WITH 2 COATS OF CEMENT PAINT ABOVE FINISH GRADE, PARGE WITH 1/2" CEMENT-MORTAR BELOW FIN. GRADE.
 7. DRAINS TO MEET LOCAL CONDITIONS.