



- (A) - HONEYWELL MOD. T875A THERMOSTAT, 55 / 175 * F
- (B) - 120 V TOGGLE SWITCH
- (C) - IN-LINE FUSE HOLDER W/ 20 A FUSE
- (D) - DAYTON No. 5X850 RELAY
- (E) - DAYTON MOD. 2C781 BLOWER
- (F) - 1 KW-110 V CONE TYPE HEATING ELEMENT W/ PORCELAIN BASE

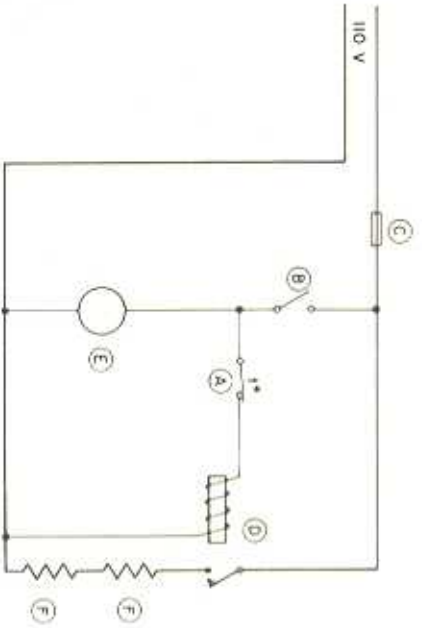

SCHEMATIC

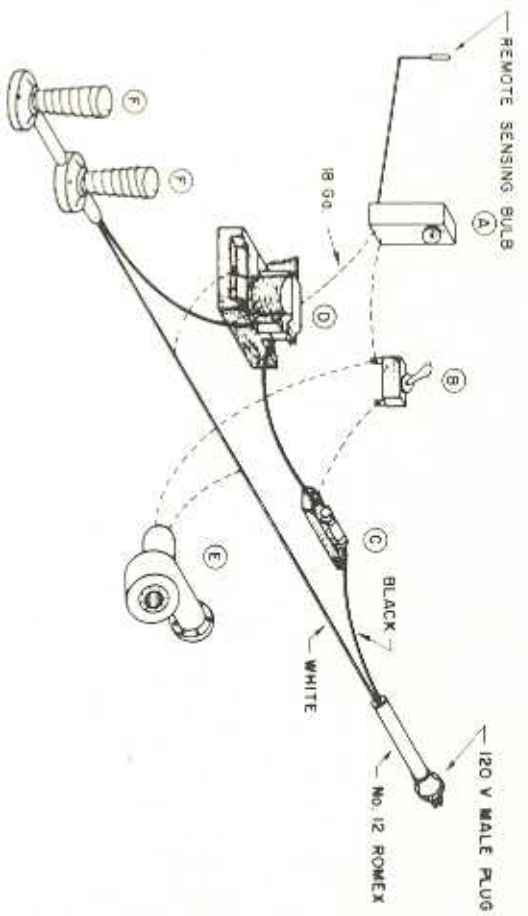

ALTERNATE WIRING DIAGRAM

NOTE:

WIRING DIAGRAM SHOWN ON SHEET 3 REQUIRES A LINE VOLTAGE THERMOSTAT RATED AT 20 AMP RESISTIVE. IF THIS TYPE OF THERMOSTAT IS NOT AVAILABLE, THE WIRING DIAGRAM SHOWN ON THIS SHEET MAY BE USED. THE OPERATION OF THIS DRYER REQUIRES A 110 V - 20 AMP CIRCUIT. TO PREVENT OVERLOADING OF CIRCUIT, DO NOT OPERATE DRYER ON A CIRCUIT WITH OTHER APPLIANCES.

Information shown herein is for educational purposes only. Reference to Commercial Products or Trade Names is made with the understanding that no discrimination is intended and no endorsement is implied.

COOPERATIVE EXTENSION WORK IN
AGRICULTURE AND HOME ECONOMICS

UNITED STATES DEPARTMENT OF AGRICULTURE COOPERATING
AND
NATIONAL EXPERIMENTAL STATION

FRUIT DRIER

OKLA. '75 6202 SHEET 4 OF 4