



FRONT ELEVATION

Scale: 1/8" = 1'-0"
 by *W. J. ...*

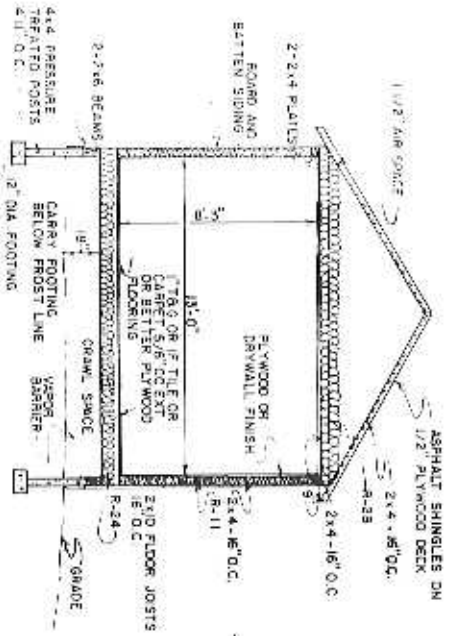


CROSS SECTION

Scale: 1/8" = 1'-0"
 by *W. J. ...*

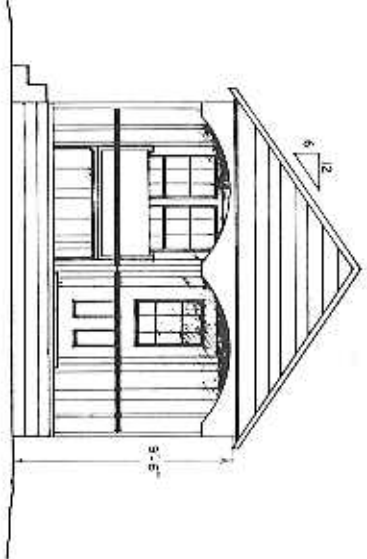


SIDE ELEVATION

Scale: 1/8" = 1'-0"
 by *W. J. ...*

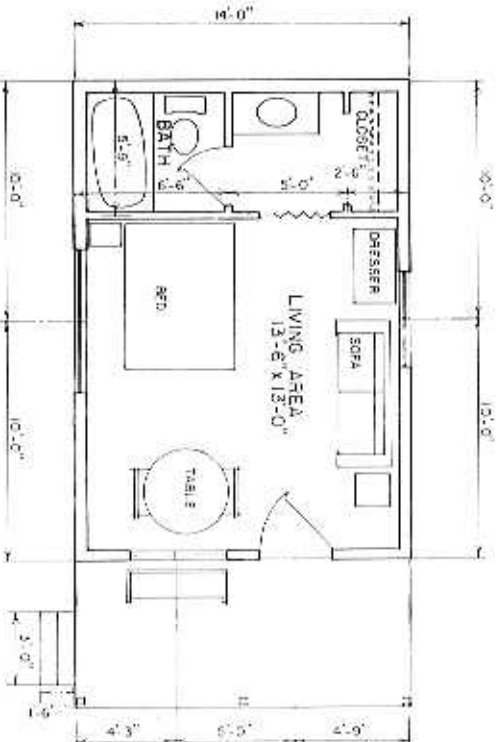

FLOOR PLAN

Scale: 1/8" = 1'-0"
 by *W. J. ...*

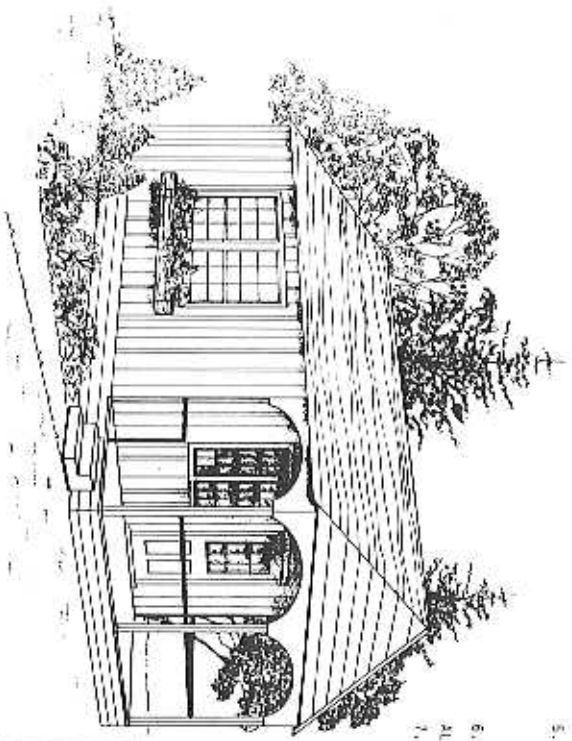

PERSPECTIVE (NO SCALE)

CONSTRUCTION CHECK LIST

1. CHECK LOCAL BUILDING CODES CRITERIA.
2. ADEQUATELY NAIL AND ANCHOR JOINTS.
3. USE EXTERIOR GRADED PLYWOOD WHEREVER IT MAY BE WETTED DURING OR AFTER CONSTRUCTION.
4. PRESSURE TREAT ALL WOOD WITH GROUND CONTACT AND PROVIDE OTHER NEEDED TERMITE CONTROL.
5. PROVIDE 1.50 FT. OF ATTIC VENT OPENINGS FOR EACH 150 SQ. FT. OF CEILING. PROVIDE SAME AMOUNT OF VENTILATION FOR THE CRAWL SPACE.
6. WEATHERIZE ALL OPENINGS AND JOINTS.

ALTERNATIVES:

1. AN 8" INCH THICK MASONRY PERIMETER FOUNDATION COULD BE USED IN PLACE OF THE POST AND BEAM CONSTRUCTION OR A THICKENED EDGE SLAB CAN BE USED BUT EDGE INSULATION SHOULD BE PROVIDED AROUND PERIMETER OF SLAB TO REDUCE HEAT LOSS AND REDUCE POTENTIAL FROST OVERWAL PROBLEM.
2. A THROUGH-ROOF WALL ELECTRIC HEAT/ A/C UNIT IS SUGGESTED IF ATTIC SPACE IS USED FOR HEATER. LOCATE IT ABOVE DATA WATER HEATER. IT COULD BE UNDER VANITY COUNTERS AT ONE END OF CLOSET OR IN ADD ON SHEO SHELTER AT REAR.

COOPERATIVE EXTENSION SERVICE
 AGRICULTURE AND HOME ECONOMICS

UNITED STATES DEPARTMENT OF AGRICULTURE, COOPERATING

DETACHED GUEST HOUSE
 WITHOUT KITCHEN

USDA 86 5186 SHEET 1 OF 1

REV 86