
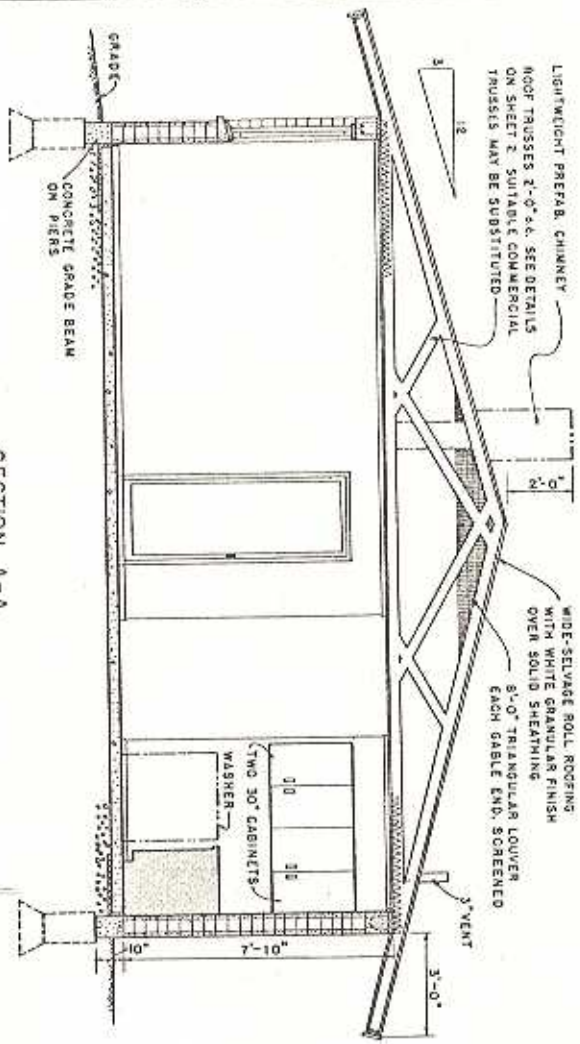


PERSPECTIVE

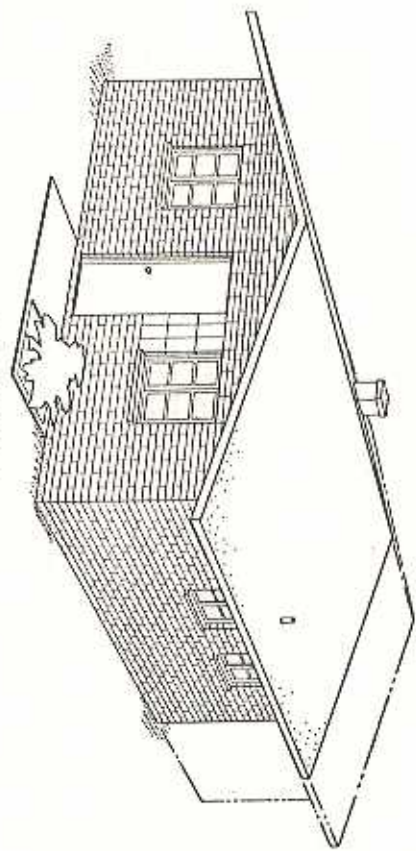


LIGHTWEIGHT PREFAB. CHIMNEY
ROOF TRUSSES 2'-0" x 4'. SEE DETAILS
ON SHEET 2. SUITABLE COMMERCIAL
TRUSSIS MAY BE SUBSTITUTED

WIDE-SELVAGE ROLL ROOFING
WITH WHITE GRANULAR FINISH
OVER SOLID SHEATHING
8'-0" TRIANGULAR LOUVER
EACH GABLE END, SCREENED

FOR ECONOMY AND EASE OF CONSTRUCTION, APPLY THE
INTERIOR WALL, CEILING AND FLOOR FINISH BEFORE
ERECTING ANY PARTITIONS. THIS WILL ALSO PERMIT
FUTURE REMOVAL OR MOVING OF ANY PARTITIONS
EXCEPT THOSE WHICH CONTAIN PLUMBING.

THE FINISH GRADE SHOULD SLOPE AWAY
FROM THE CABIN ON ALL SIDES.
SEE DETAILS ON SHEET 2 FOR ALTERNATE
FOUNDATION DETAILS

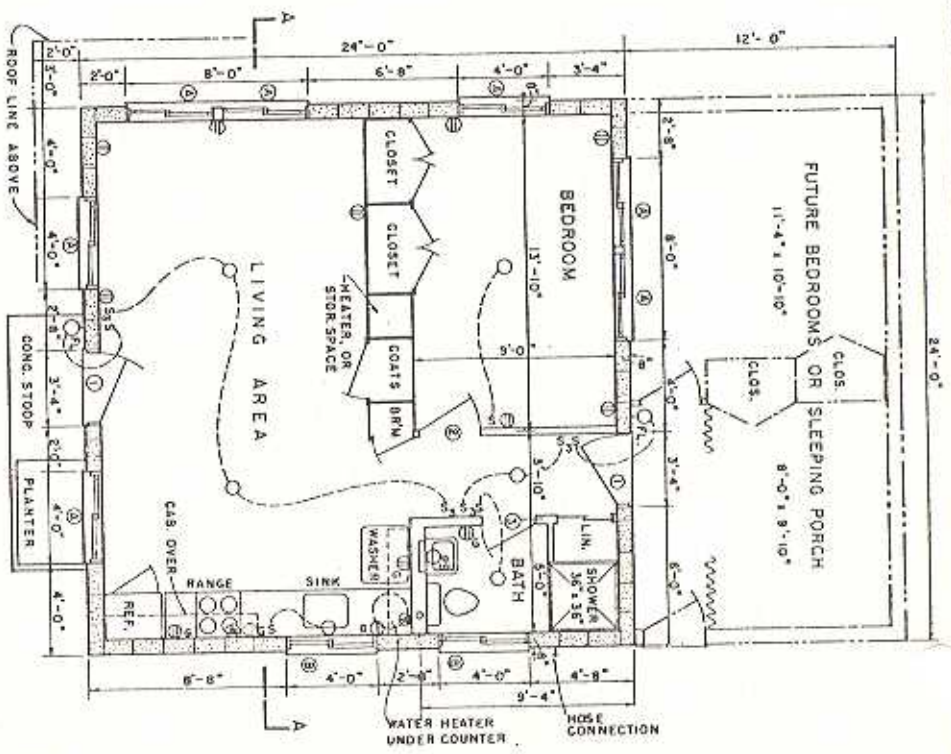

ROUGH
WINDOW SCHEDULE (OPENINGS)

- ① 4'-0" WIDE X 4'-0" HIGH
- ② 4'-0" " X 2'-8" "
- ③ PACKAGED SLIDING WINDOWS
TYPE AND TRIM TO BE AS
SELECTED BY OWNER.

DOOR SCHEDULE

- ① 3'-0" X 5'-8" EXTERIOR
- ② 2'-0" X 5'-8" INTERIOR
- ③ 2'-6" X 6'-8" "

ELECTRICAL SYMBOLS

- S SWITCH
- 3S THREE-WAY SWITCH
- DELTA FIXTURE, RECESSED
- PS WALL FIXTURE, PULL SWITCH
- PL FLOORLIGHT
- PL DUPLEX CONVENIENCE OUTLET
- G DUP CONV. OUTLET WITH GROUND
- W 250 VOLT, RANGE & WATER HEATER

COOPERATIVE EXTENSION WORK IN
AGRICULTURE AND HOME ECONOMICS
DEPARTMENT OF AGRICULTURAL ENGINEERING
UNIVERSITY OF MARYLAND
UNITED STATES DEPARTMENT OF AGRICULTURE COOPERATING

CABIN

P.O.A. '64 EX. 5968 SHEET 1 OF 3