


NOTE:
BUILD ROOF FRAME IN TWO PANELS
NAIL EACH PANEL TO PRESSURE
TREATED (P.T.) POSTS, THEN ATTACH
THE TWO OUTSIDE PURLINS.


FRAME PICTORIAL

NOTES:
TOTAL OUTSIDE DIMENSIONS AFTER
CONSTRUCTION APPROXIMATELY 12x16'
FLOOR MAY BE DIRT OR CONCRETE.
CONSULT LOCAL HEALTH AND BUILDING
CODE AUTHORITIES BEFORE STARTING
CONSTRUCTION.


NOTE:
ROOF MAY BE METAL OR 1/2" EXT. PLYWOOD OR OTHER
SHEATHING WITH SHINGLES OR ROLL ROOFING. INSULATE
ROOF WITH INSULATION BOARD OR 2" OF FIBERGLASS.

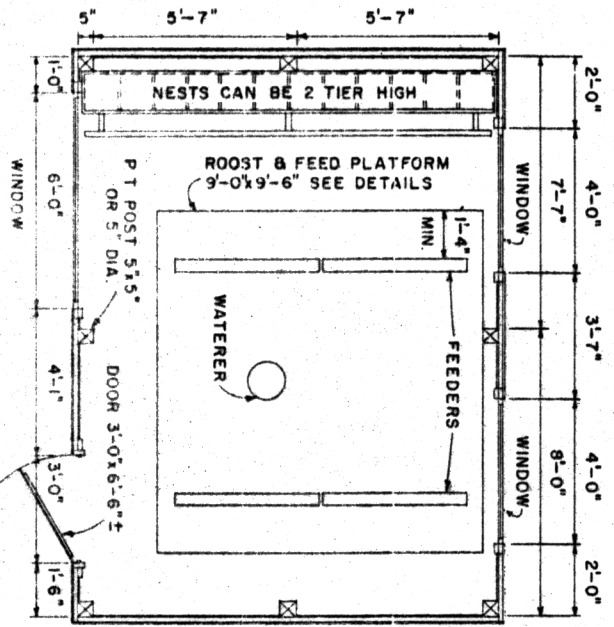


FLOOR PLAN

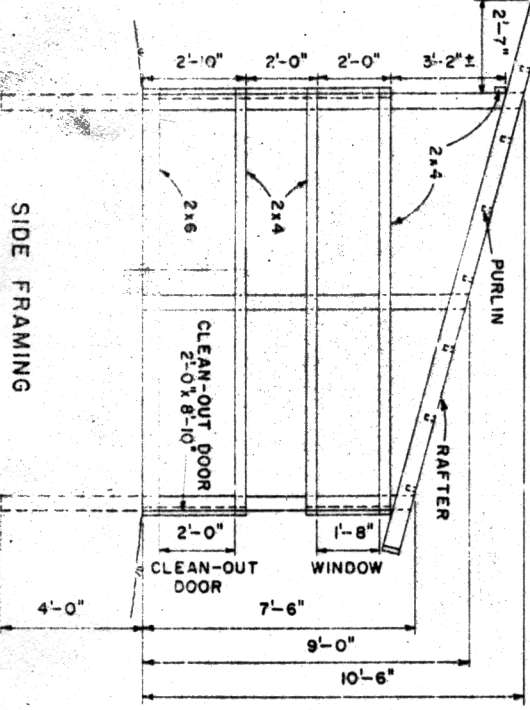

SIDE FRAMING

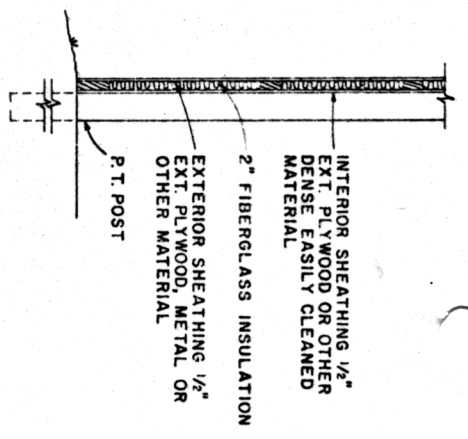

TYPICAL WALL SECTION

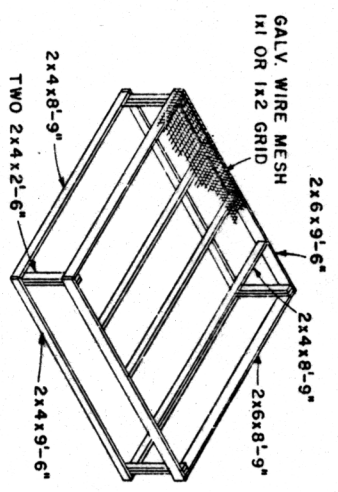

ROOST & FEED PLATFORM DETAILS

NOTE:
ENCLOSE BOTH ENDS AND ONE SIDE WITH
1/2" EXT. PLYWOOD. OPEN SIDE TO FACE
OUTSIDE CLEAN-OUT DOOR. MUST BE
BUILT INSIDE OF HOUSE.

BASED ON: W. VA. UNIV.
PLAN NO. PO 146

OTHERWISE NOTED

SCALE: 1/4" = 1'-0"

COOPERATIVE EXTENSION WORK IN
AGRICULTURE AND HOME ECONOMICS

UNITED STATES DEPARTMENT OF AGRICULTURE COOPERATING
AND
POULTRY HOUSE
50 TO 80 LAYERS

W. VA. 7-4 6188 SHEET 1 OF 1