



PLAN TO SUIT OPERATION


BATTER BOARDS & STAKES

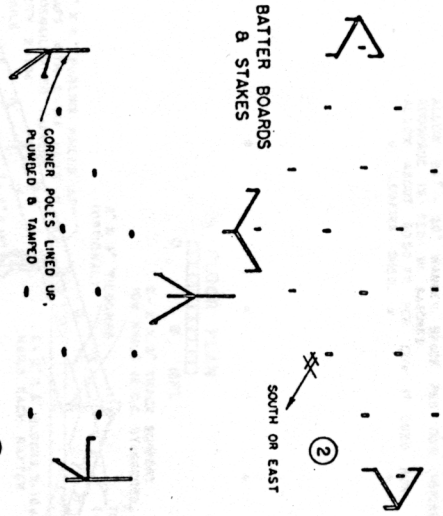

POST HOLES


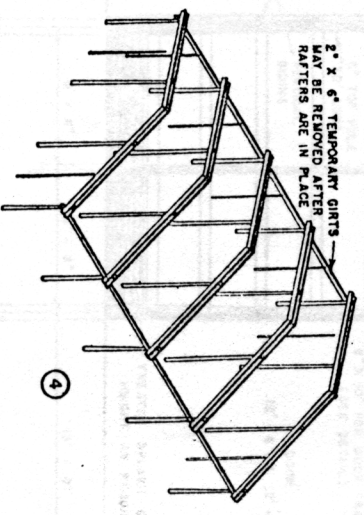


ERECTION OF BALANCE OF POLES & RAFTERS

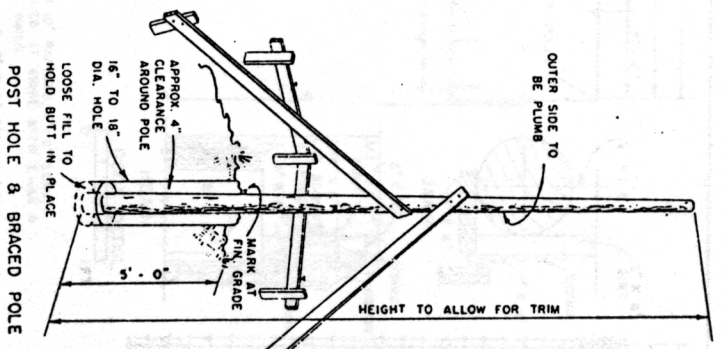


POST HOLE & BRACED POLE

POLE & RAFTERS

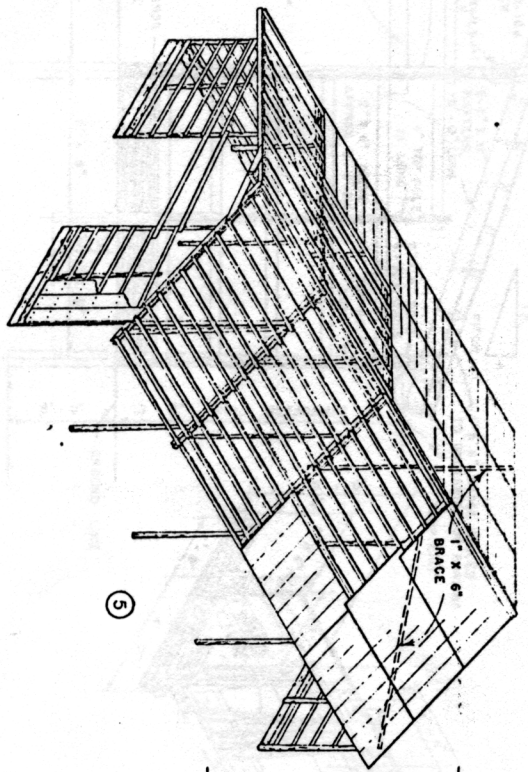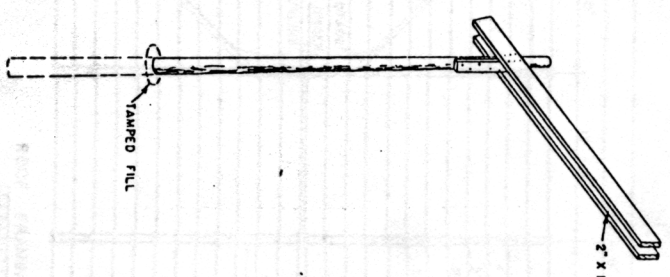

PURLINS, GIRTS, ROOFING & SIDING

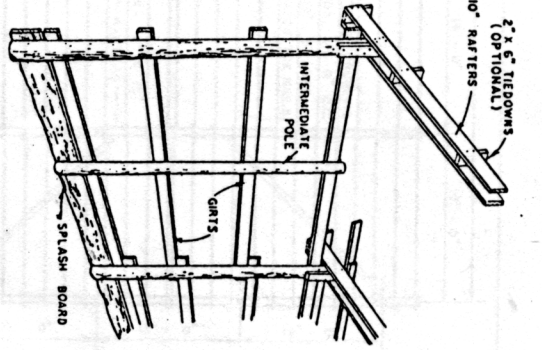

POLES, RAFTERS, PURLINS & GIRTS

NOTE  
ALL POLES & SPLASH BOARDS TO BE PRESSURE-TREATED WITH PRESERVATIVE

NOTE  
THIS BUILDING IS DESIGNED FOR AREAS OF THE SOUTHERN UNITED STATES WHERE THE SNOW LOAD DOES NOT EXCEED 10" PER SQ. FT. & WIND DOES NOT EXCEED 88 MI PER HOUR.  
IN A FEW AREAS, SUCH AS NORTHERN VIRGINIA & WESTERN KENTUCKY WHERE SNOW LOADS EXCEED 10" PER SQ. FT., 2" x 12" RAFTERS SHOULD BE USED INSTEAD OF THE 2" x 10" RAFTERS SHOWN & PURLINS SHOULD BE SPACED 16" O.C. INCREASE NUMBER OF 304 NAILS IN RAFTER TO POLE CONNECTIONS 50%. IT SHOULD NOT BE USED IN OTHER AREAS WITHOUT REDESIGNING FRAMING TO MEET LOCAL CONDITIONS.

NOTE  
THIS BARN MAY BE BUILT IN ANY LENGTH DESIRED IN UNITS OF 15'-0"