


SHEEP BARN

NOTE: 1. CAPACITY 120 HEAD. AREA FOR EWES WITH LAMBS
 2. LENGTH OF BUILDING MAY BE VARIED IN UNITS OF 12 FEET, 2 EWES/FT OF LENGTH.

(SEE PLAN NO. 5733 FOR INTERIOR DETAIL)

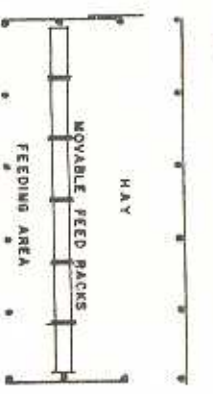

CATTLE HAY BARN


CAPACITY 24 TO 32 HEAD
 (SEE PLAN NO. 5794 FOR INTERIOR DETAIL)



MACHINERY STORAGE

(SEE PLAN NO. 5734 FOR INTERIOR DETAIL)

NOTE: THIS BUILDING IS DESIGNED FOR USE IN AREAS WHERE THE SNOW LOAD DOES NOT EXCEED 36 POUNDS PER SQUARE FOOT AND WINDS ARE NOT ABOVE 80 MPH PER HOUR.

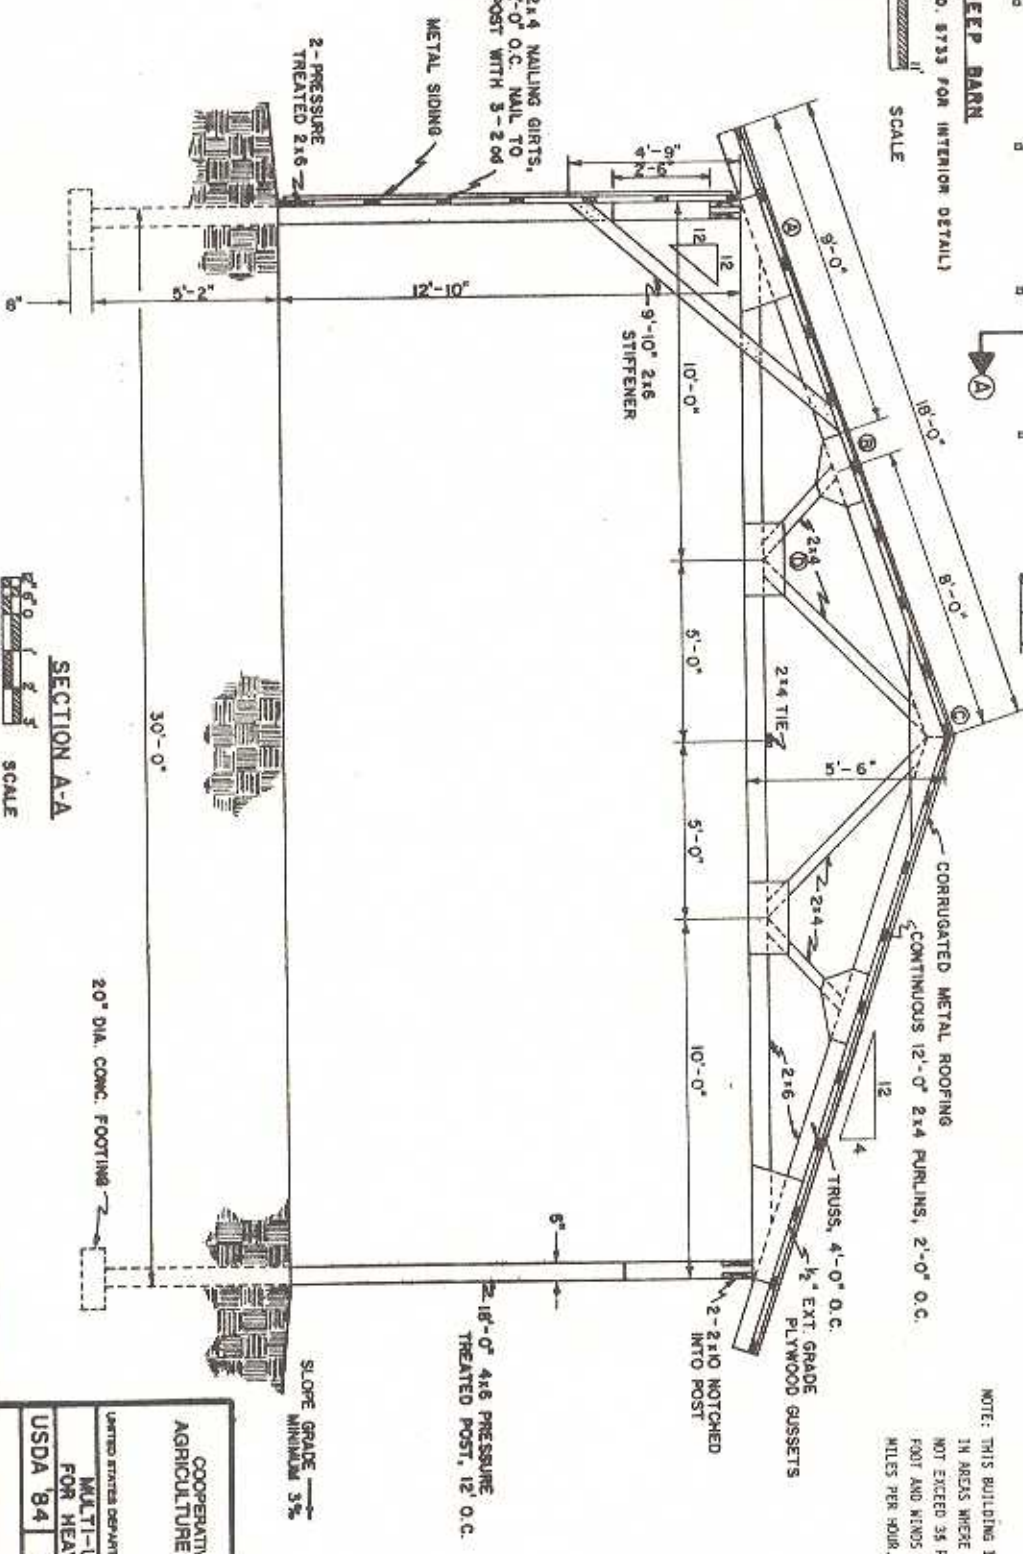

2x4 NAILING GIRTS,
 2'-0" O.C. NAIL TO
 POST WITH 3-20d

METAL SIDING

2 - PRESSURE
 TREATED 2x6

2 - 9'-10" 2x6
 STIFFENER

2x4 TIE

CORRUGATED METAL ROOFING

CONTINUOUS 12'-0" 2x4 PURLINS, 2'-0" O.C.

TRUSS, 4'-0" O.C.
 1/2" EXT. GRADE
 PLYWOOD GUSSETS

2 - 2x10 NOTCHED
 INTO POST

2 - 18'-0" 4x6 PRESSURE
 TREATED POST, 12 O.C.

SLOPE GRADE
 MINIMUM 3%

SECTION A-A



20" DIA. CONC. FOOTING