


NOTE: THIS TROUGH IS MADE FOR PORTABILITY. THE HIGH SIDES ARE REMOVABLE. THE CLEATS IN THE BOTTOM OF THE TROUGH SHOULD BE CENTERED PROPERLY WHILE IN USE. BY MAKING THIS TROUGH NARROW, THE SHEEP ARE LESS LIKELY TO STRUGGLE TO GET OUT OVER THE SIDES.

- BILL OF MATERIALS**
- 2 PCS.-1/4"-0x8"-0" EXTERIOR PLYWOOD-REMOVABLE SIDES AND TROUGH SIDES.
 - 1 PC.-2x8x10'-0" GOOD GRADE FIR - TROUGH BOTTOM AND ENDS.
 - 7 PCS.-1x2x6 1/4" CLEATS.
 - 2 PCS.-1x8x14" NAILED ON TROUGH ENDS TO PREVENT OVERTURNING.
 - 1 PC.-1/2"x11/2"x23 1/2" STRAP IRON-CENTER REINFORCING.
 - 2 CARRIAGE BOLTS - 1/2"x1"-BOLT ON STRAP IRON.
 - WATER PROOF GLUE ON ALL WOOD JOINTS.
 - GALVANIZED NAILS, SPIKES, AND BOLTS.

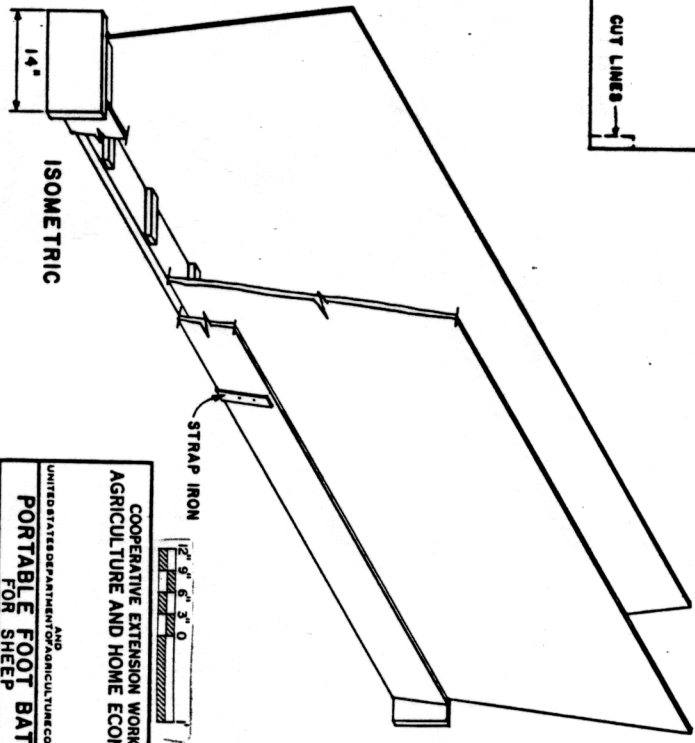

BASED ON: OREGON STATE UNIV. PLAN NO. 96

UNIVERSITY OF OREGON DEPARTMENT OF AGRICULTURE COOPERATING AND			
COOPERATIVE EXTENSION WORK IN AGRICULTURE AND HOME ECONOMICS			
PORTABLE FOOT BATH FOR SHEEP			
ORE	72	6142	SHEET 1 OF 1